


EXPO SINGLE H



Tool-carrier with hydraulic extension



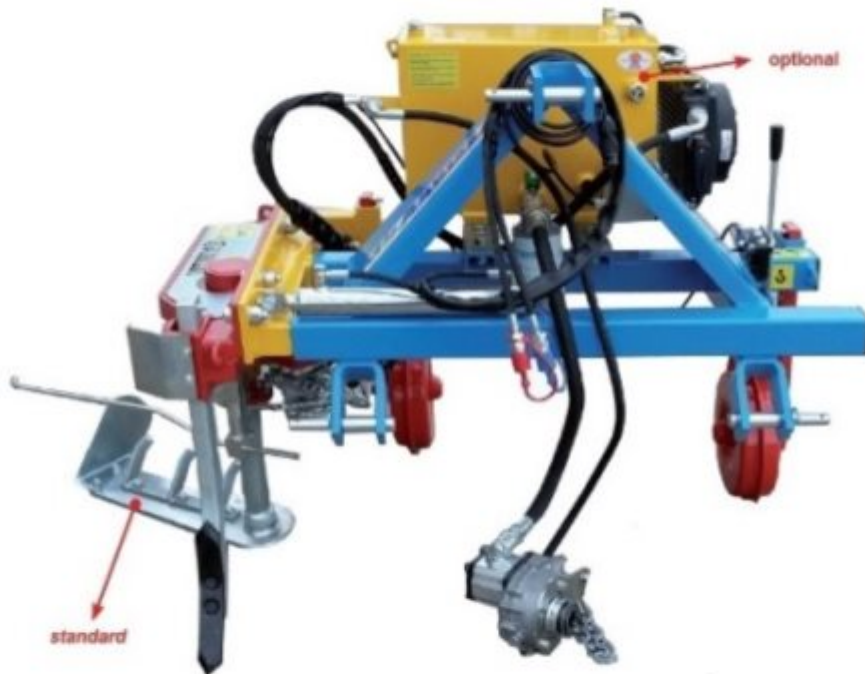




Available in version with front or rear three-point couplings


55 cm RH side inter-row blade with quick tractor attachment and mechanic emergency blade return

Bulldozer-like tilling spur

RH and LH wheels for depth mechanic adjustment and side stability control

30cm side widening with 2 quick couplings to the tractor

Model	 CODE						 Kg.
Expo singolo HS	1258	40 - 60	30	112 / 142	20	165 min	265
Expo singolo H	0771	40 - 60	30	130 / 160	20	190 min	275
Expo singolo HX	1145	40 - 60	30	150 / 180	20	235 min	315

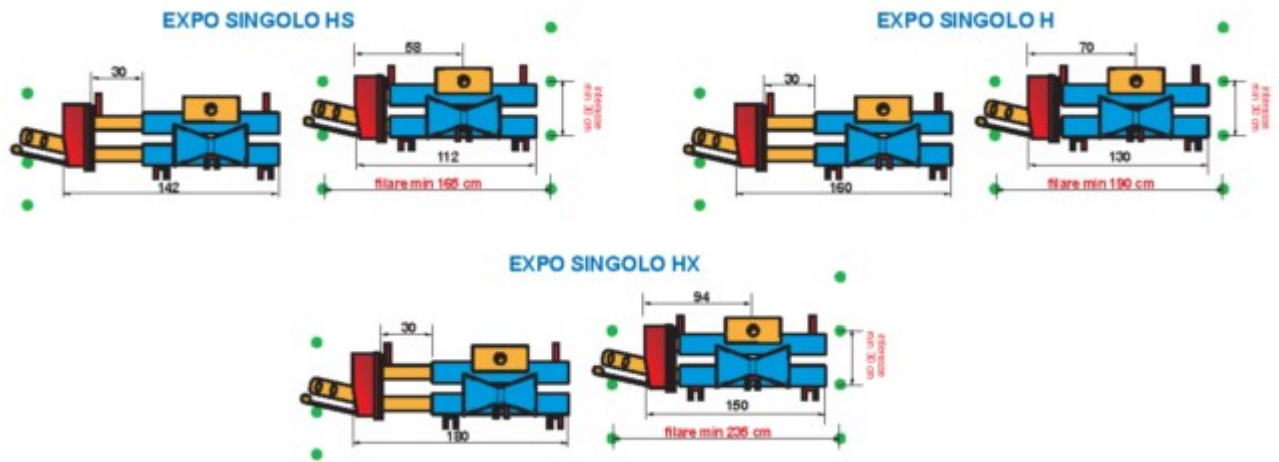

Optional

- CODE 1290 - Type H kit including tank, oil, filter, pump, multiplier and single heat exchanger kit with thermostat
- CODE 1287 - Flow diverter system to control 2 double effect cylinders SEPARATELY with only 2 quick tractor couplings
- CODE 0698 - RH hydraulic inter-row inclination with 2 quick tractor couplings. Dimension cm 6,5
- CODE 0982 - Blade with clod breaker, fin and feeler pin cm 45 (additionally at the standard blade)
- CODE 0695 - Blade with clod breaker, fin and feeler pin cm 65 (additionally to standard blade)
- CODE 1160 - RH non-stop feeler pin holder
- CODE 1085 - RH oscillating feeler pin holder adjustable in height
- CODE 0483 - RH sled for terrain with stones or superficial roots
- CODE 1187 - RH 45 cm inter-row plant lifting ploughshare
- CODE 1268 - RH 55 cm inter-row plant lifting ploughshare
- CODE 0702 - RH plant lifting plough kit with front depth directional wheel [cannot be used at the same time as the adjustable RH/LH ground cover cod. 1046/1047]
- CODE 1266 - Universal no traction adjustable rounded tiller disc
- CODE 0488 - RH no traction bulldozer-disk diam. 320
- CODE 1264 - Universal no traction adjustable ridger bit disc
- CODE 1312 - Universal no traction adjustable serrated ridger 2-discs complete with cleaner on first disk
- CODE 1341 - Kit hydraulic system for work with rotary brush, mower head, mini chopper head and rotary mower head when RH NON STOP PATENTED VALVE is not apply (only when ordering - necessary hydraulic system)

- CODE 1247 - RH vertical wires mower with adapter for Expo versions and wheel with mechanical adjustment for depth adjustment (without patented valves requires application CODE 1341)

- CODE 0718 - RH traction mini-shredder head (without patented valves requires application CODE 1341)

- CODE 0720 - RH traction mower head with blades or strings diam. 500 (without patented valves requires application CODE 1341)

- CODE 1150 - RH hydraulic rotary brush with gear motor and oscillating adapter (without patented valves requires application CODE 1341)

[Print this page](#)